

Filtration Media Pressure Vessels - Accessories

Residential FRP Media Vessel Tank Tops



890S - D7171



990S - D1226



890C - D7173



RA201 890 - R7009



1191 In-Out Head - D1400



1190FP In-Out Head
with Fill Port



1191 In-Out Head shown
optional V3006Bypass Assembly
and V3007-01 3/4" x 1" PVC
Solvent Elbow Assembly



900M - D1221

Top Basket Distributors



D1203
D1203-01/-02/-03



D1206
D1207



D1208
D1209-1



D1211



D1236
D1237
D1238

Bottom Stack Distributors



D1210



D1212-04



D1212-21
D1212-23



D1225-05



D1225-08
D1225-12

Top Stack Distributors

Filtration Media Pressure Vessels - Accessories

Bottom Felt Distributor



D7184

Bottom Steel Plate Distributor



D1190

Bottom Steel Plate Distributor



D1192


Adapter



D1135

Top Mount Bottom Stack Distributors

Clack bottom stack distributors are designed primarily for use with top mount water softeners or filter valves. The stack distributors are comprised of individual ABS segments which are held together with 18-8 stainless steel screws. The segmented stack has the ability to open up when backwashed, removing any fines that might accumulate on the distributor. The standard slot size is 0.010 - 0.013. Clack bottom stack distributors are designed for use with 14" – 36" diameter fibreglass mineral tanks with a 4" – 6" top openings. The bottom stack distributors are designed to accommodate a number of different size riser pipes which can be solvent welded or threaded directly into the stack. There is no stack distributor assembly required. To install, solvent weld or thread the riser pipe directly into the distributor and extend the distributor to the bottom of the mineral tank.

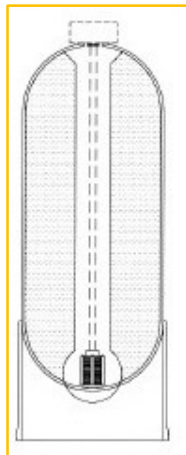

D1196 *



D1197 *



D1198 *


Riser Pipe Openings Available (*)

- 05 – 1.25" solvent
- 06 – 1.25" FPT
- 07 – 1.5" solvent
- 08 – 1.5" FPT
- 09 – 50mm solvent
- 10 – 2" solvent
- 11 – 2" FPT

Hub and Lateral Series for Top Mount Valves

Clack top mount hub and lateral systems are designed primarily for use with top mount water softeners or filter valves. The top mount hub and lateral series is designed to accommodate 14" – 36" diameter fibreglass mineral tanks with 4" – 6" top openings. The top mount hub and lateral series consists of an ABS hub and 8-PVC slotted laterals with 3/4" threaded adaptors. The hub is available with a number of openings to accommodate different riser pipe diameters. To install, simply solvent weld or thread the riser pipe into the hub and insert it into the tank through the top opening. Thread laterals into the hub and extend the hub and laterals to the bottom of the mineral tank.

Filtration Media Pressure Vessels - Accessories

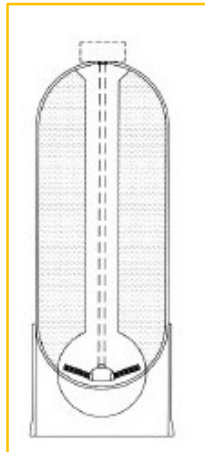

Top Mount Hub and Lateral Series

Riser Pipe Openings Available (*)

- 02 – 1.320" solvent
- 03 – 32mm solvent
- 04 – 1.050" solvent
- 05 – 1.25" solvent
- 06- 1.25" FPT
- 07 – 1.5" solvent
- 08 – 1.5" FPT
- 09 – 50mm solvent
- 10 – 2" solvent
- 11 – 2" FPT

Top Distributors for Top Mount Valves

The Clack top stack distributors, diffusers and baffle diffusers are designed to be used in conjunction with the Clack WS1.5, WS2 and WS2L, the Autotrol Magnum CV™ and the Fleck 2850, 9500, 2900 and 3150 Control Valves. The stack and baffle diffusers are designed to diffuse or break up the inlet water flow when the top stack distributor is not used. The top stack distributors, diffusers and baffle diffusers are designed to accommodate a 1.5", 50mm or 2" PVC riser pipe. Installation is accomplished by simply pinning or screwing in the top stack distributor and diffuser or snapping the top baffle diffuser directly inside the control valve.



D1199
D1199-04
D1199-02



For Flange Tanks
D1201-01
D1200-02
D1200-03



D1219



For Flange Tanks
D1227



D1300
D1300-01